

Control Box

CI10



Features

- ◆ CI10 equips the built-in rocker switch to control the operation for one actuator; no additional handset is required.
- ◆ Main applications : industrial automation
- ◆ Input voltage : 110V AC 60Hz / 230V AC 50Hz (adjustable by slide switch)
- ◆ Output voltage : 24V DC
- ◆ Max. current : 10A @ 24V DC
- ◆ Overload protection current : 13A
- ◆ Max. number of actuators this control box can drive : 1
- ◆ Duty cycle : 10% or 2 min continuous operation in 20 min.
- ◆ Color : Pantone 432U
- ◆ Cable type : power cord
- ◆ Cable length : 3000mm
- ◆ Emergency stop button
- ◆ Power indicator LED
- ◆ 2nd output for supplementary device : 24V DC @350mA.

Options

◆ N/A

Compatibility



1. Handset

N/A

2. Actuator

ID10

Dimension

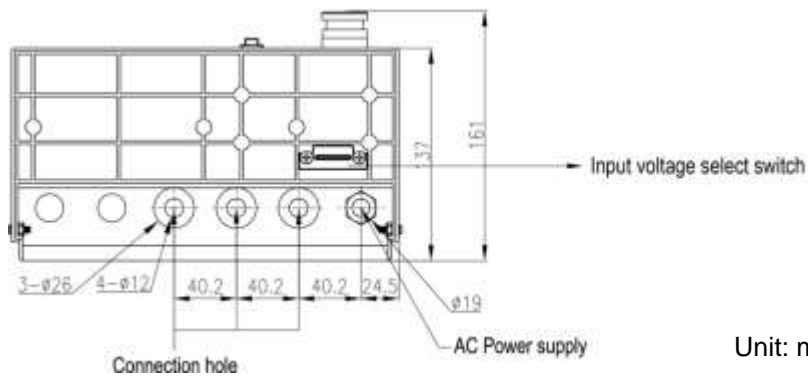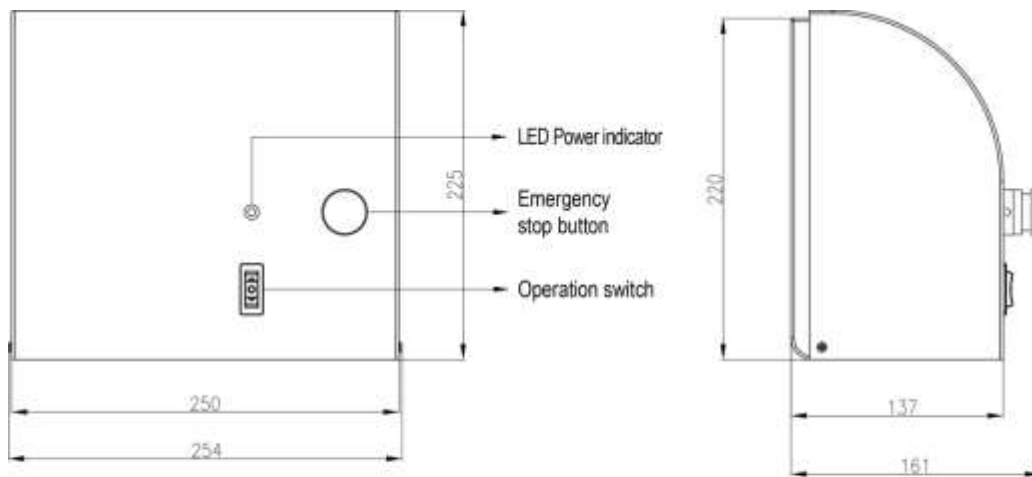

Unit: mm

Ordering Key

CI10—□□□—24—1—□—□

Type

Input Voltage

110 : 110V AC

230 : 230V AC

Output Voltage

24 : 24V DC

Number of Motors

1 : for 1 actuator

Power Cord Length

1 : 3000mm

Z : Customized

Power Plug Type

1 : US / JP / TW plug

2 : EU plug

3 : UK plug

4 : AU plug

5 : CN plug

Terms of Use

The user is responsible for determining the suitability of MOTECK products for specific applications. Due to continuous development in order to improve its products, MOTECK products are subject to frequent modifications and changes without prior notice. MOTECK reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by MOTECK.